



Audio Monitor System GMS 1820 A

Analog Audio Monitor System

8 channels mono

Input amplifier switchable between 0, 20 and 40 dB

19", 1U



Technical Data

Eingänge

No. of inputs	8 rear side, symmetrical
Voltage:	-80 dBu ... + 24 dBu
Frequency range:	10 Hz ... 22 kHz
Impedance:	10 k Ohm
Connectors:	rear side XLR, female

Input amplifier: 8, between 0, 20 und 40 dB switchable

Loudspeaker amplifier

No. of amplifier:	2
Output power:	max.2 W RMS per channel
Volume controller:	1
Volume level at mute:	-90 dB @ 1 kHz

Control buttons

Push buttons with LED:	8 for 8 inputs 1 für Mute
Volume controller:	1

Power supply


Power supply voltage range:	85 VAC ... 264 VAC
Frequency range:	47 Hz ... 63 Hz
Power consumption:	approx. 20 VA
Fuse:	1 A
Connector:	IEC integral plug EN 60320

Casing



fully magnetically shielded

Width:	19" (482.6 mm)
Heigh:	1 U (44.1 mm)
Depth:	150 mm
Weight:	2.9 kg

Control elements

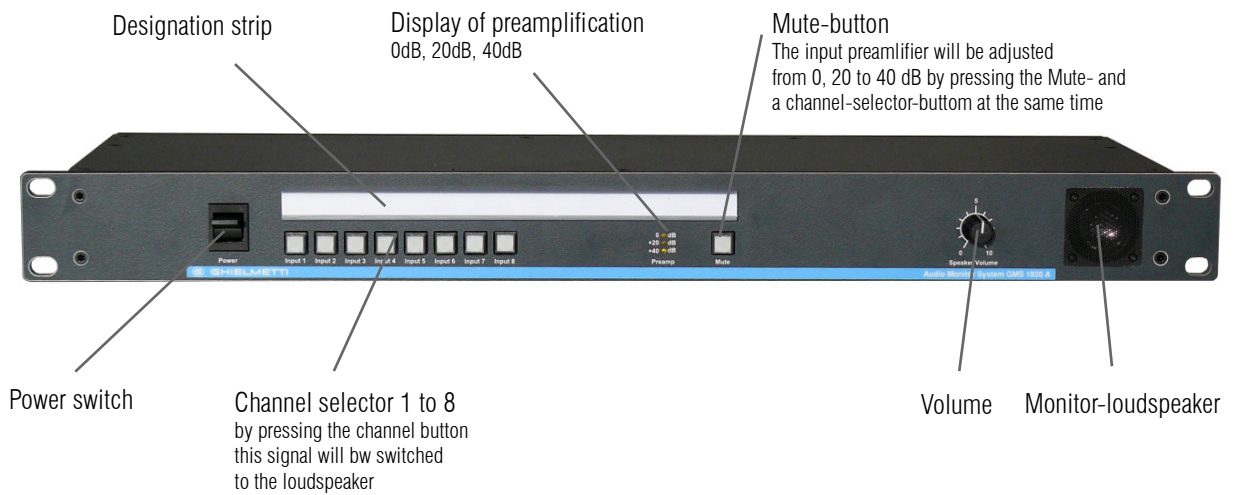

Back view

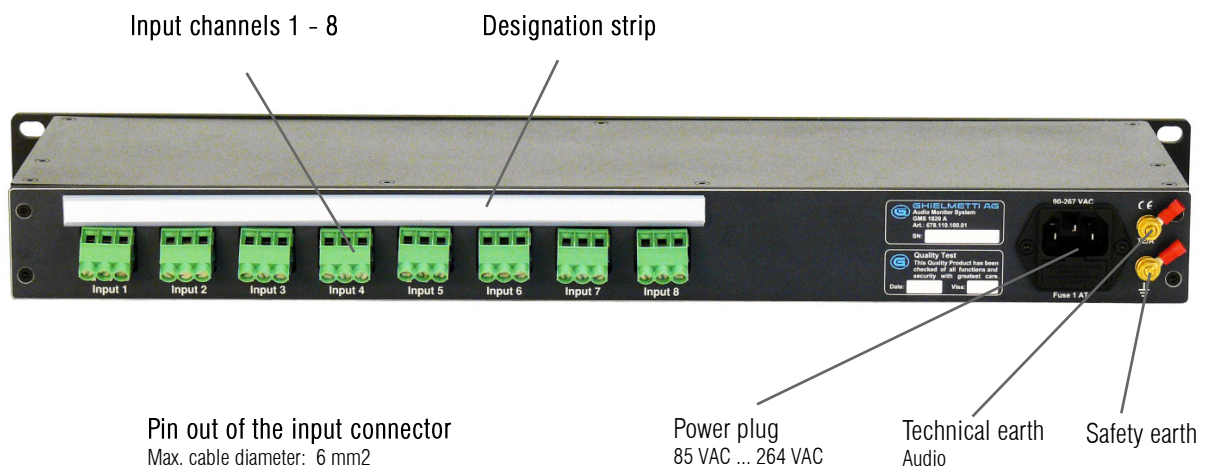

Ghielmetti AG | Industriestrasse 6 | 4562 Biberist | Switzerland
Tel. +41 32 671 13 13 | Fax. +41 32 671 13 14
www.ghielmetti.ch | info@ghielmetti.ch



GHIELMETTI AG
Switzerland, Headquarter
Tel.: +41 32 671 13 13
Fax: +41 32 671 13 14
info@ghielmetti.ch
www.ghielmetti.ch



Ghielmetti in Germany
Ghielmetti Berlin-Luckenwalde
Tel. +49 3371 402 754
Fax +49 3371 610 548
brodziak@ghielmetti.ch
www.ghielmetti.ch



Ghielmetti in Germany
Ghielmetti Chemnitz
Tel. +49 371 330 41 10
Fax +49 0371 330 41 11
selbmann@ghielmetti.ch
www.ghielmetti.ch



Ghielmetti in USA
SDRayASSOCIATES
Tel. +1 310 921 6070
Mobil: +1 818 601 7202
sdray@earthlink.net
www.sdrayassociates.com



Ghielmetti in Austria
Ing. Johann Götz
Tel.: +43 699 1090 22 60
Fax: +43 699 1974 29 51
johann.goetz@chello.at



Ghielmetti in Belgium/Luxembourg
IXART
Tel: +32 495 29 24 29
Fax: +32 2 646 35 63
info@ixart.be
www.ixart.be



Ghielmetti in Netherlands
Ceelen Techniek
Tel: +31 413 25 60 90
Fax: +31 413 25 51 60
info@ceelen.nl
www.ceelen.nl



Ghielmetti in France
AUIDIS
Tel: +33 1 43 99 94 05
Fax: +33 1 43 39 10 55
E-mail: info@auvidis.fr



Ghielmetti in Great Britain
CANFORD AUDIO PLC.
Tel: +44 191 418 1000
Fax: +44 191 418 1001
sales@canford.co.uk
www.canford.co.uk



Ghielmetti in Italy
CPE Italia spa
Tel: +39 02 39 09 61
Fax: +39 02 35 70 765
sales@cpeitalia.it
www.cpeitalia-group.com



Ghielmetti in Spain
Promovisa S.A.
Tel: +34 914 562 090
Fax: +34 915 332 166
info@promovisa.es
www.promovisa.es



Ghielmetti in Greece
AUDIGYS
Tel: +30 210 764 94 35
Fax: +30 210 764 94 34
info@audigys.gr
www.audigys.gr



Ghielmetti in Slovenia
Albin Promotion
Tel: +386 2 761 97 00
Fax: +386 2 761 97 29
info@ap-pro.si
www.albin-promotion.si



Ghielmetti in England
Argosy
Tel: +44 1844 202 101
Fax: +44 1844 202 025
sales@argosycable.com
www.argosycable.com



Ghielmetti in Slovakia
elatec s.r.o.
Tel: +421 2 6542 0344
Fax: +421 2 6542 3660
elatec@elatec.sk
www.elatec.sk



Ghielmetti in Poland
TWENTY 4 SEVEN s.c.
Tel: +48 22 632 66 22
Fax: +48 22 632 66 52
gm@twenty4seven.pl
www.twenty4seven.pl



Ghielmetti in Russia
Binar ProSound + Light
Tel: +7 495 730 73 33
Fax: +7 495 257 58 97
binar@binar.ru
www.binar.ru



Ghielmetti in Ukraine
Technical Brothers Ltd.
Tel: +380 44 587 97 81
Fax: +380 44 587 97 82
info@techbrothers.tv
www.techbrothers.tv



Ghielmetti in Czech Republik
elatec s.r.o.
Tel: +421 2 6542 0344
Fax: +421 2 6542 3660
elatec@elatec.sk
www.elatec.sk



Ghielmetti in Norway
Siv. Ing. Benum A/S
Tel: +47 22 13 99 00
Fax: +47 22 14 82 59
post@benum.no
www.benum.no



Ghielmetti in Sweden
Semafor Mediateknik AB
Tel: +46 8 556 785 50
Fax: +46 8 556 785 55
bz@semafor.se
www.semafor.se



Ghielmetti in Finland
Profitron Oy
Tel: +358 400 101 220
Fax: +358 20 755 96 66
info@profitron.fi
www.profitron.fi



Ghielmetti in Morocco
Abchir S.A.R.L
Tel: +212 22 86 44 51
Fax: +212 22 86 44 50
salima@abchir.com
www.abchir.com



Ghielmetti in Israel
Broadcast Design – Micha Blum
Tel: +972 2 656 02 01
Fax: +972 57 796 12 24
mihablum@012.net.il
www.broadcastdesign.co.il



Ghielmetti in Iran
Besat Broadcasting Systems Co.
Tel: +9821 676 336
Fax: +9821 677 471
Besatsales@dpimail.net



Ghielmetti in India
AVF Distributors Pvt Ltd.
Tel: +91 22 2405 7187
Fax: +91 22 2405 41 90
info@avfindia.com
www.avfindia.com



Ghielmetti in Vietnam
VISTAR Company Ltd.
Tel: + 844 828 76 66
Fax: + 844 825 00 99
duongnt@vistar.vn
www.vistar.vn



Ghielmetti in China/Hong Kong
Delco Wire & Cable (Asia) Ltd.
Tel: +852 2 7999 393
Fax: +852 2 7989 323
delco@delcoasia.com
www.delcowire.com



Ghielmetti in Japan
Electori Co., Ltd.
Tel: +81 3 3530 62 00
Fax: +81 3 3974 24 21
international@electori.co.jp
www.electori.co.jp



Ghielmetti in Korea
Ko Hoong Multimedia Co.,
Ltd.
Tel: +82 2 487 00 69
Fax: +82 2 474 06 78
kmsong@chol.com



Ghielmetti in Singapore
Broadcast Professional Pte. Ltd.
Tel: +65 622 55 115
Fax: +65 622 55 005
gary_teo@broadcastpro.com.sg
www.broadcastpro.com.sg

